
60-0137RC Kawasaki ZX4RR Clutch Cover Protector

Installation Instructions

1) Remove the four bolts from the bottom of the RHS OEM cover.

2) Attach the skid plate to the Woodcraft cover by bolting it from the inside.

IMPORTANT - USE BLUE THREADLOCKING COMPOUND ON THE SKID PLATE MOUNTING BOLTS.

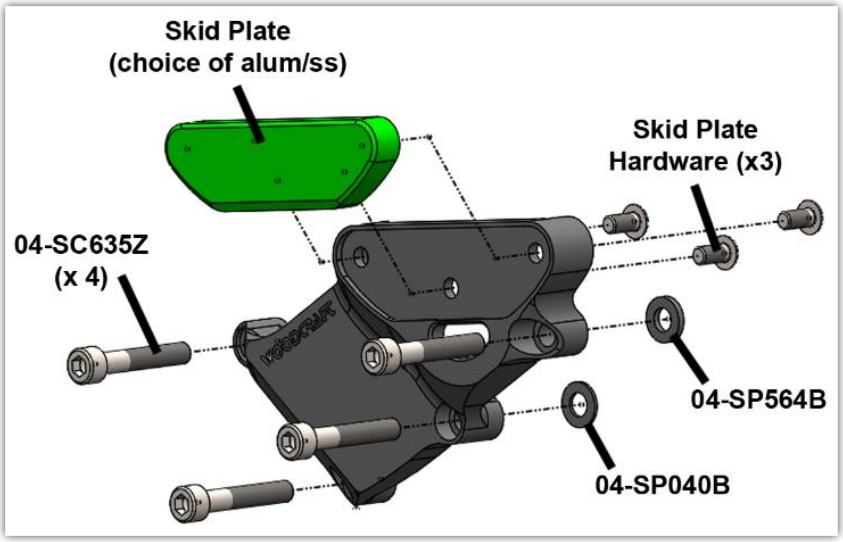

4) Install the Woodcraft cover with the included 6x35mm socket cap mounting hardware and torque the bolts to approximately 7 ft-lbs. Please note the location of the two spacers that go between the Woodcraft cover and the OEM cover.

5) Start the motorcycle and inspect for any leaks before riding.



WARNING

Installation of Woodcraft Billet Covers involve removal and reinstallation of certain factory components such as fasteners, stators and oil-retention gaskets. FAILURE TO INSTALL THESE COMPONENTS IN COMPLIANCE WITH ALL SPECIFIC INSTRUCTIONS SUPPLIED WITH BILLET COVER KIT, MAY CAUSE OIL LOSS OR DAMAGE TO ENGINE RESULTING IN LOSS OF CONTROL OF MOTORCYCLE AND SERIOUS INJURY OR DEATH.