

Box: PLOCK 1

BIKE	KAWASAKI Ninja ZX-6R	PART NO.	KA-1001
YEAR	2009 - 2012	FIT KITS	Z039.10392
NOTES	Use standard fittings where not supplied Remove standard gasket if fitted.	DB-Killer	SCEXDBK28 - (Type EE)

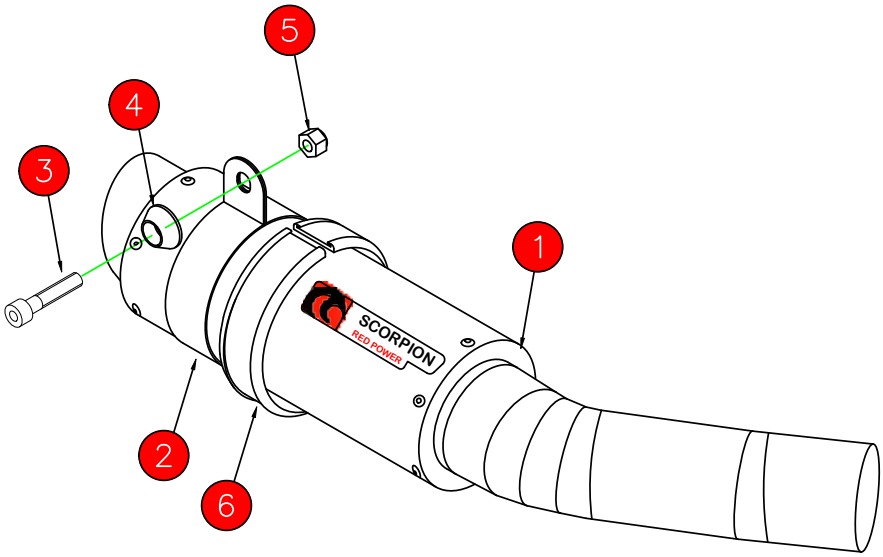




DO NOT TURN ON BIKE UNTIL INSTALLATION IS COMPLETE AND SERVO WHEEL HAS BE FULLY INSTALLED.

1 225mm RP-1 GP Slencer SC160 with integrated CP 583
2 Titanium Silencer Strap (Z028.10013)
3 M8 x 40mm Cap Head Bolt (Z017.10076)
4 1 off Bolt Finisher (Z026.20068)
5 M8 Nyloc nut (Z017.10062)
6 Square edge rubber (Z029.10024)
7 Servo Wheel (Z007.10955)
8 Aluminium coller (Z026.20045)
9 M6 split washer (Z017.10027)


CLASSIFICATION	Closed Circuit Product
HOMOLOGATED	NO
DATE	07/10/2026
ISSUE	07
AUTHORISED	G O'Shea

NOTE: ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.


A

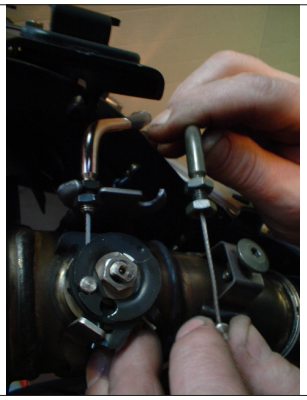


B

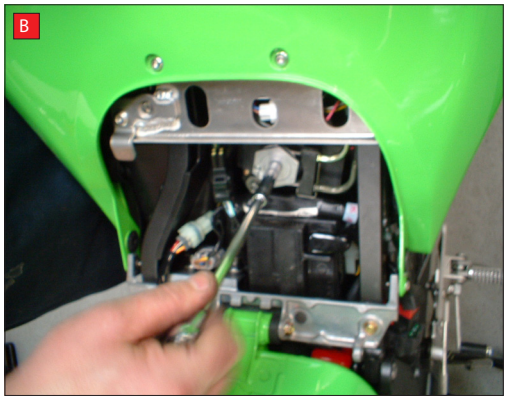

C

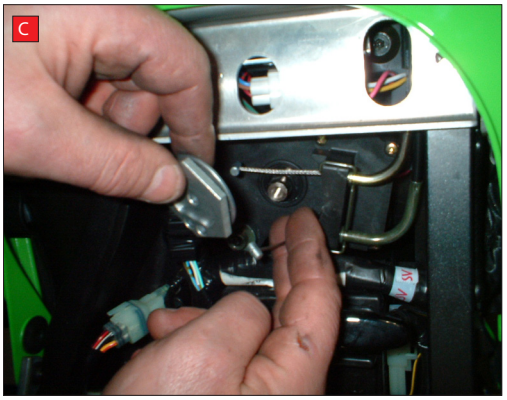

D

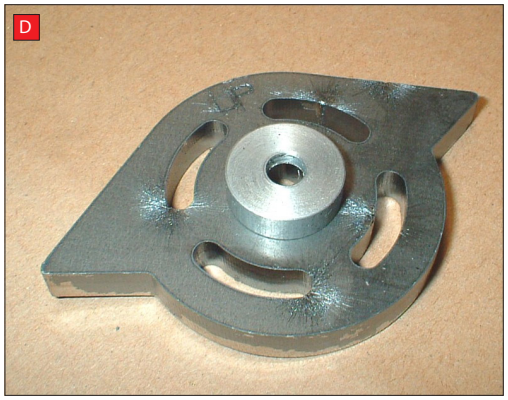

A) Disconnect cables on exhaust valve and leave loose..

B) To disconnect cables at the servo box end, you have to remove the hexagonal wheel, without turning it's shaft.
Remove bolt in centre of hexagonal wheel using an 8mm socket. Support wheel if tight.

C) Remove hexagonal wheel from shaft, retaining OE bolt. DO NOT turn shaft.
Remove spring clip retaining cables and completely remove the cables

D) The replacement wheel comes with an aluminium collar & spring washer that is secured in place with OE bolt – TIGHTEN TO 5ft/lb USING A TORQUE WRENCH.


SCORPION RED POWER

Box: PLOCK 1

BIKE	KAWASAKI Ninja ZX-6R	PART NO.	KA-1001
YEAR	2009 - 2012	FIT KITS	Z039.10392
NOTES	Where not supplied use original fittings. Remove standard gasket if fitted.	Db-Killer	SCEXDBK28 - (Type EE)

CONTINUED FROM OVERLEAF:



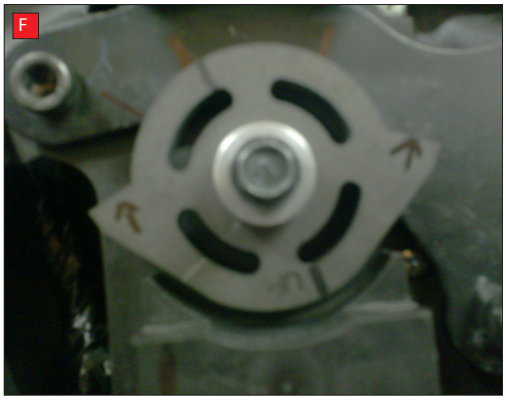

The replacement wheel must be fitted with the etched letters "UP"

E IS RIGHT!
F IS WRONG!