
SCORPION RED POWER

SCORPION // FITTING INSTRUCTIONS

HAND BUILT IN ENGLAND

Bike	KTM 1290 Super Duke R	**Part No.**	RKT-90
Year	2017-2024	**Fit Kit**	Z039.10644
Notes	Where not supplied use original fittings. Remove OE Gasket as fitment provides correct sealing when tightened.	**dB Killer**	N/A

Estimated Fitting Time: 60 Minutes

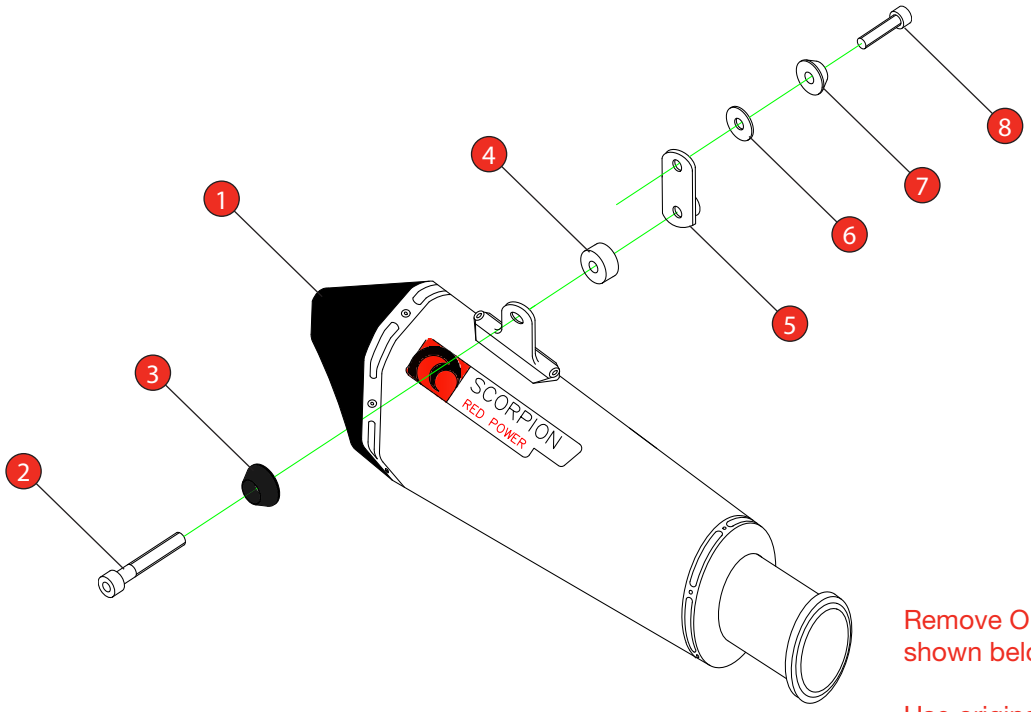

Remove OE gasket as shown below.

Use original clamp.

NO.	PART NO.	DESCRIPTION	QTY
1	RSC443	Serket Taper Silencer	1
Fit Kit - Z039.10644			
2	Z017.10075	M8 x 35mm Cap Head Bolt	1
3	Z026.20068B	Black Alloy Bolt Finisher	1
4	Z026.20181	15mm Black Alloy Spacer	1
5	Z007.31613	Mounting Bracket	1
6	Z017.10825	M8 x 25mm Washer	1
7	Z026.20068	Alloy Bolt Finisher	1
8	Z017.10072	M8 x 20mm Cap Head Bolt	1

CLASSIFICATION	Closed Circuit Product
HOMOLOGATED	NO
DATE	28/10/2026
ISSUE	11
AUTHORISED	G O'Shea

NOTE: ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.

Remove Gasket as shown in the Photo



STAY CONNECTED TO RED POWER.

SCORPION RED POWER

Bike	KTM 1290 Super Duke R	**Part No.**	RKT-90
Year	2017-2024	**Fit Kit**	Z039.10644
Notes	Where not supplied use original fittings	**dB Killer**	N/A

Estimated Fitting Time: 60 Minutes



A) Remove original exhaust from bike, taking care to keep all original components in a safe place.

B) Refit Scorpion exhaust as per line diagram above.

C) When fitted take bike for a short ride to ensure all functions are correct.

D) When bike & exhaust are cool enough check all nuts and bolts are still secure.

Thank you for purchasing your Scorpion Silencer.
Care of your exhaust: Please refrain from cleaning silencer with heavy solvents or abrasives!

Vielen Dank Fur den kauf eines Scorpion Schalldampfers! Pflegehinweis: Bitte verwenden Sie niemals Scheuermittel oder aggressive Reiniger zur Pflege Ihres Auspuffes!

Merci d'avoir choisi un echappement Scorpion.
Entretien de votre silencieux: Ne pas utiliser de solvants ou de produits abrasifs!

Muchas gracias por adquirir un Silencioso Scorpion. Le recomendamos no limpiar el silencioso con productos abrasivos o aquellos que contengan disolventes.