
Box: PLOCK 1

BIKE	KAWASAKI ZX-6R / ZX-636	PART NO.	RKA-97
YEAR	2013-2018	FIT KITS	Z039.20476
NOTES	Use standard fittings where not supplied Remove standard gasket if fitted.	DB-Killer	SCEXDBK23 - (Type V)

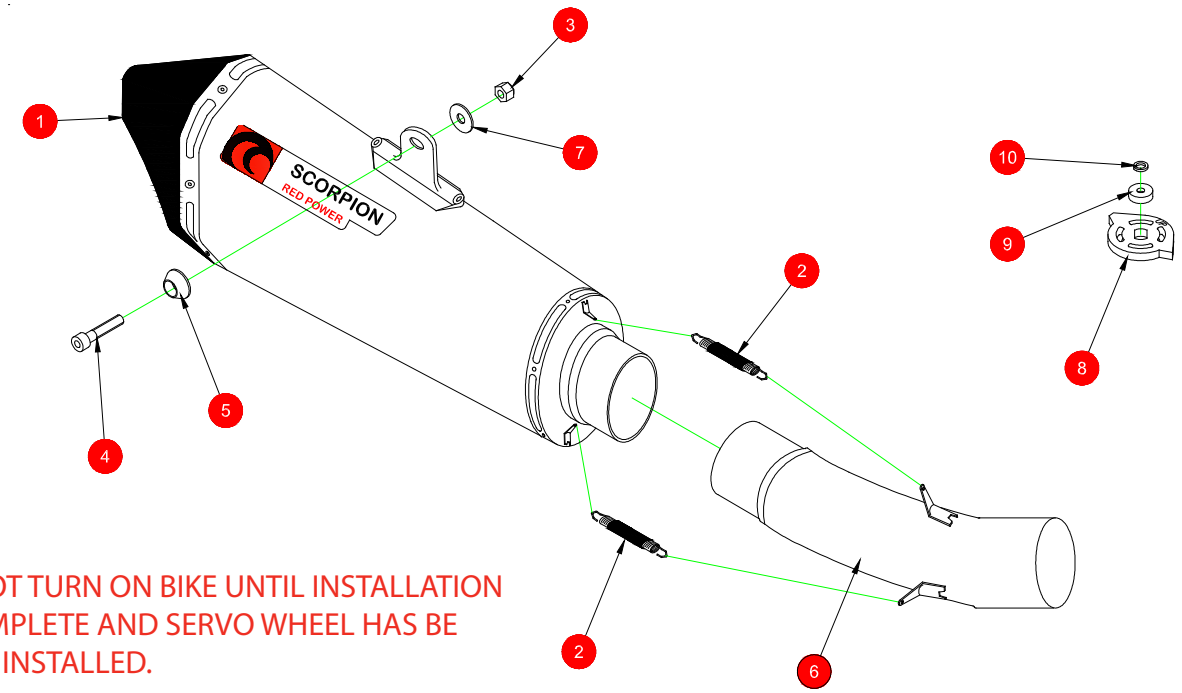

DO NOT TURN ON BIKE UNTIL INSTALLATION IS COMPLETE AND SERVO WHEEL HAS BE FULLY INSTALLED.

1 Serket 275mm Conical Silencer RSC533
2 2 x Rubber Coated Springs (Z028.10030)
3 M8 Nyloc Nut (Z017.10062)
4 M8 x 45mm Cap Head Bolt (Z017.10077)
5 Aluminium Bolt Finisher (Z026.20068)
6 Connecting Pipe CP708
7 M8 x 17mm Washer (Z017.10831)
8 Servo Wheel (Z007.10955)
9 Aluminium Coller (Z026.20045)
10 M6 Split Washer (Z017.10027)

CLASSIFICATION	Closed Circuit Product
HOMOLOGATED	NO
DATE	28/10/2026
ISSUE	07
AUTHORISED	G O'Shea



Box: PLOCK 1

BIKE	KAWASAKI ZX-6R / ZX-636	PART NO.	RKA-97
YEAR	2013 - 2018	FIT KITS	Z039.20476
NOTES	Use standard fittings where not supplied Remove standard gasket if fitted.	FEATURES	


CONTINUED FROM OVERLEAF:






A) Remove both side plastics (2 off) by removing front screw then remove panels from cips and velcro.


B) Once done you can now access the two screws that hold the seat in place, one screw each side of seat, then slide off.

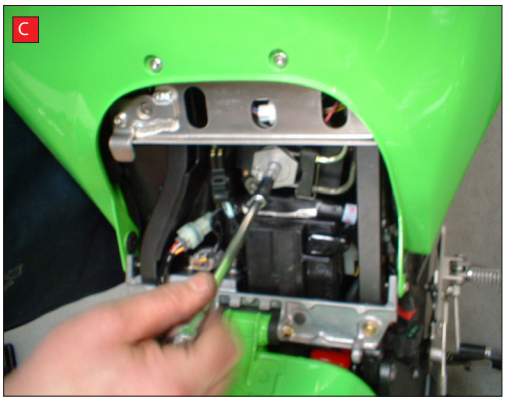


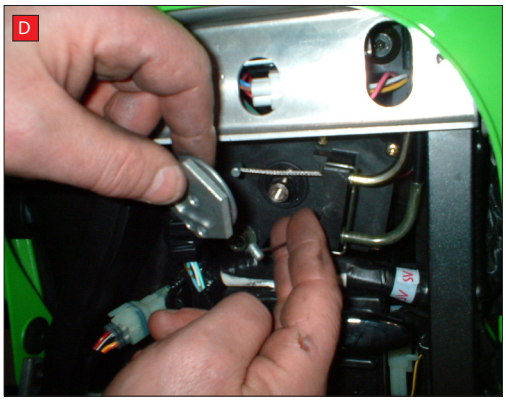

C) To disconnect cables at the seat end, you have to remove the hexagonal wheel, without turning it's shaft. Remove bolt in centre of hexagonal wheel. Support wheel if tight.

D) Remove hexagonal wheel from shaft, retaining OE bolt.
DO NOT TURN SHAFT.
Remove spring clip retaining cable and completely remove the cables.

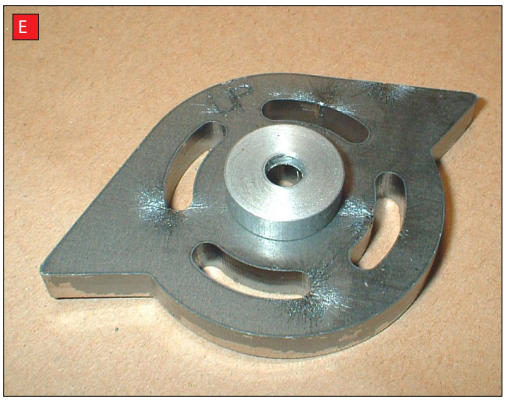

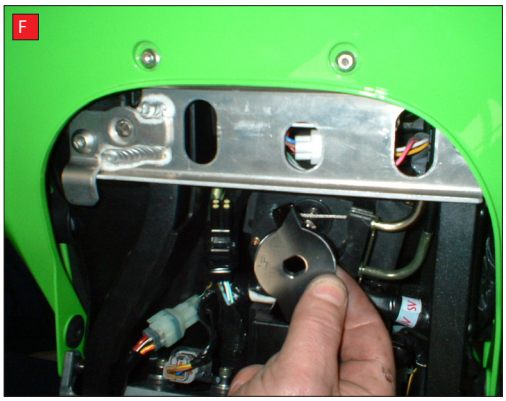


E) The replacement wheel comes with a aluminium collar that is secured in place with OE bolt and split washer.
DO NOT OVER TIGHTEN.

F) The replacement wheel must be fitted with the etched letters "UP"

G) The repacement wheel will ony fit ONE WAY with letters "UP". In case of difficulty please contact us.

With servo wheel fitted, the loose cables will be removed with rest of exhaust system.

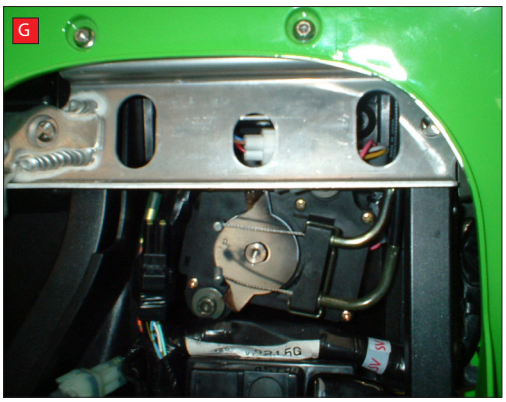

Box: PLOCK 1

BIKE	KAWASAKI ZX-6R / ZX-636	PART NO.	RKA-97
YEAR	2013 - 2018	FIT KITS	Z039.20476
NOTES	Use standard fittings where not supplied Remove standard gasket if fitted.	FEATURES	

Thank you for purchasing your Scorpion Silencer.
Care of your exhaust: Please refrain from cleaning silencer with heavy solvents or abrasives!

Vielen Dank Fur den kauf eines Scorpion Schalldampfers! Pflegehinweis: Bitte verwenden Sie niemals Scheuermittel oder aggressive Reiniger zur Pflege Ihres Auspuffes!

Merci d'avoir choisi un echappement Scorpion.
Entretien de votre silencieux: Ne pas utiliser de solvants ou de produits abrasifs!

"Muchas gracias por adquirir un Silencioso Scorpion. Le recomendamos no limpiar el silencioso con productos abrasivos o aquellos que contengan disolventes."